

**CASE**  
CONSTRUCTION  
SINCE 1842

**FULL-LINE**  
**EQUIPMENT SOLUTIONS**







# MINOTAUR COMPACT DOZER LOADER

SPECIFICATIONS	DL550
Gross hp (kW)	114 (85) RPM
Operating weight w/ Ripper, w/18-in Steel Track – lb (kg)	18,600 (8 444)
Operating weight w/o Ripper, w/ 18-in Steel Track – lb (kg)	18,800 (8 527)
Bucket breakout force – lbf. (kN)	12,907 (57.4)
Rated operating capacity ROC 50% / 35% – lb. (kg)	5,500 (2 500) / 3,850 (1 750)



\*Comes standard with CASE SiteWatch telematics and the CASE SiteConnect Module

## RIP. DOZE. LOAD. LEARN MORE.


Part dozer. Part loader. All beast. From first-of-its-kind capabilities to pure brute force and power, the CASE Minotaur™ DL550 compact dozer loader is unlike any machine that's ever hit your jobsite. Scan the QR codes featured here to learn more and see how this groundbreaking machine can transform the way you work.



Walkaround Video



Electro-Hydraulic  
Dozer Settings



Blade Shake



Attaching and Detaching  
the Integrated C-Frame



The Ripper



Three-Function Foot Pedal




CASE Universal  
Machine Control



Dozer Power Modes



The SiteConnect Module



Track Options



# COMPACT TRACK LOADERS

SPECIFICATIONS	TR270B	TR310B	TR340B	TV370B
Gross hp (kW)	74 (55) @ 2500 RPM	74 (55) @ 2500 RPM	90 (67) @ 2500 RPM	74 (55) @ 2500 RPM
Operating weight – lb. (kg)	8,270 (3 750)	8,880 (4 027)	10,000 (4 536)	9,945 (4 520)
Bucket breakout force – lbf. (kN)	7,270 (32.3)	8,680 (38.6)	8,700 (38.7)	8,593 (38.2)
Rated operating capacity ROC 50% / 35% – lb. (kg)	2,700 (1 225) / 1,890 (860)	3,100 (1 406) / 2,170 (984)	3,400 (1 542) / 2,380 (1 079)	3,700 (1 682) / 2,590 (1 178)

SPECIFICATIONS	TV450B	TV620B*
Gross hp (kW)	90 (67) @ 2500 RPM	114 (85) @ 2500 RPM
Operating weight – lb. (kg)	10,610 (4 823)	16,100 (7 311)
Bucket breakout force – lbf. (kN)	9,188 (41.8)	12,907 (57.4)
Rated operating capacity ROC 50% / 35% – lb. (kg)	4,500 (2 045) / 3,150 (1 432)	6,200 (2 812) / 4,340 (1 969)



# SKID STEER LOADERS

SPECIFICATIONS	SR160B	SR175B	SV185B	SR210B
Gross hp (kW)	60 (44.7) @ 2800 RPM	67 (50) @ 2800 RPM	60 (44.7) @ 2800 RPM	74 (55) @ 2500 RPM
Operating weight – lb. (kg)	5,645 (2 560)	6,270 (2 842)	6,570 (2 980)	6,970 (3 160)
Bucket breakout force – lbf. (kN)	5,270 (23.4)	7,270 (32.3)	5,550 (24.7)	7,270 (32.3)
Rated operating capacity ROC 50% – lb. (kg)	1,600 (726)	1,750 (790)	1,850 (840)	2,100 (955)

SPECIFICATIONS	SR240B	SR270B	SV280B	SV340B
Gross hp (kW)	74 (55) @ 2500 RPM	90 (67) @ 2500 RPM	74 (55) @ 2500 RPM	90 (67) @ 2500 RPM
Operating weight – lb. (kg)	7,400 (3 350)	8,117 (3 681)	8,000 (3 630)	9,100 (4 136)
Bucket breakout force – lbf. (kN)	8,680 (39.4)	8,677 (38.6)	8,620 (38.3)	9,531 (42.4)
Rated operating capacity ROC 50% – lb. (kg)	2,400 (1 088)	2,700 (1 225)	2,800 (1 270)	3,400 (1 545)









## BACKHOE LOADERS CONSTRUCTION KINGS

SPECIFICATIONS	Utility Plus	580SV	580N EP	580N	580 Super N	580 Super N WT
Gross hp (kW) @ 2200 RPM	74 (55)	97 (72)	74 (55)	90 (67)	97 (72)	110 (82)
Loader lift capacity – lb. (kg)	8 157 (3 700)	7 606 (3 450)	6,503 (2 950)	6,803 (3 086)	7,044 (3 195)	8,425 (3 822)
Backhoe bucket breakout force – lbf. (kN)	12 359 (5 606)	12 933 (5 755)	11,517 (51.2)	11,517 (51.2)	14,452 (64.2)	15,070 (67.0)
Operating weight, 4WD – lb. (kg)	18 298 (8 300)	18 695 (8 480)	16,093 (7 300)	17,751 (8 052)	19,750 (8 958)	20,760 (9 417)

SPECIFICATIONS	590 Super N
Gross hp (kW) @ 2200 RPM	110 (82)
Loader lift capacity – lb. (kg)	8,202 (3 721)
Backhoe bucket breakout force – lbf. (kN)	15,853 (70.5)
Operating weight, 4WD – lb. (kg)	21,325 (9 673)



**BACKHOE  
CONSIDERATIONS  
FOR THE OWNER  
OPERATOR**







## ROUGH-TERRAIN FORKLIFTS

SPECIFICATIONS	586H	588H
Gross hp (kW) @ 2200 RPM	74 (55)	74 (55)
Operating weight – lb. (kg) *4WD w/22ft mast	14,621 (6 632)	16,978 (7 701)
Lift capacity at 15-feet @ 24 in. center lb. (kg)	6,000 (2 722)	8,000 (3 629)
Max. fork height – forks horizontal	22 ft. 0 in. (6 706 mm)	22 ft. 0 in. (6 706 mm)



## LOADER/TOOL CARRIERS

SPECIFICATIONS	570N EP
Gross hp (kW)	74 (55)
Operating weight – lb. (kg)	14,508 (6 581)
Loader lift capacity – lb. (kg)	6,503 (2 950)





# GET TO KNOW THE ALL-NEW CASE E SERIES EXCAVATORS


Check out additional videos and resources to learn more about the exciting new lineup of hydraulic excavators from CASE.




CASE E SERIES  
EXCAVATORS



CASE E SERIES  
WALKAROUND



HYDRAULIC FLOW  
CONTROL BALANCE




NEW  
OPERATING  
MODES



NEW  
FPT ENGINES



CONFIGURABLE  
BUTTONS



PROPER AND  
PRODUCTIVE  
ATTACHMENT SETTINGS



CASE EXCAVATOR TOTAL  
SOLUTIONS GUIDE



# FULL-SIZED EXCAVATORS

SPECIFICATIONS	CX140E	CX170E	CX190E
Net hp (kW)	102 (76.4)	121 (90.4)	121 (90.4)
Maximum digging depth*	19 ft 10 in (6 050 mm)	21 ft 4 in (6 490 mm)	21 ft 3 in (6 470 mm)
Operating weight – lb. (kg)**	28,900 (13 100)	38,400 (17 400)	41,000 (18 600)
Bucket digging force – lbf. (kN)	21,400 (95)	26,500 (118)	26,500 (118)

SPECIFICATIONS	CX220E	CX260E	CX300E
Net hp (kW)	162 (120.4)	179 (133.4)	259 (193.4)
Maximum digging depth*	21 ft 9 in (6 640 mm)	24 ft 4 in (7 420 mm)	24 ft 10 in (7 580 mm)
Operating weight – lb. (kg)**	50,000 (22 700)	56,909 (25 814)	67,000 (30 400)
Bucket digging force – lbf. (kN)	34,621 (154)	39,566 (176)	42,781 (190)



# MID-SIZED EXCAVATORS

SPECIFICATIONS	CX75C SR	CX80C
Net hp (kW)	53.6 (40)	53.6 (40)
Maximum digging depth	13 ft 7 in (4 130 mm)	15 ft 4 in (4 670 mm)
Operating weight – lb. (kg)	17,400 (7 900)	18,900 (8 590)
Bucket digging force – lbf. (kN)	12,800 (56.9)	12,800 (56.9)





## SHORT-RADIUS EXCAVATORS

SPECIFICATIONS	CX145D SR	CX245D SR	CX365E SR
Net hp (kW)	102 (76.4)	160 (119.3)	205 (153)
Maximum digging depth	19 ft 9 in (6 010 mm)	21 ft 10 in (6 650 mm)	21 ft 1 in (6 420 mm)
Operating weight – lb. (kg)	32,100 (14 600)	56,900 (25 800)	78,600 (35 700)
Bucket digging force – lbf. (kN)	21,400 (95)	34,600 (154)	42,780 (190.3)

## SPECIALTY EXCAVATORS

SPECIFICATIONS	CX290D MATERIAL HANDLER	CX290D SCRAP & RECYCLING
Net hp (kW)	177 (132.1)	177 (132.1)
Maximum digging depth	11 ft 11 in (3 610 mm)	12 ft 9 in (3 890 mm)
Operating weight – lb. (kg)	72,100 (32 700)	71,700 (32 500)
Bucket digging force – lbf. (kN)	-	-

## LONG-REACH EXCAVATORS

SPECIFICATIONS	CX220E LR	CX260E LR	CX350D LR
Net hp (kW)	162 (120.4)	179 (133.4)	268 (200)
Maximum digging depth	21 ft 9 in (6 640 mm)	24 ft 4 in (7 420 mm)	26 ft 8 in (8 140 mm)
Operating weight – lb. (kg)	52,000 (23 600)	56,909 (25 814)	82,483 (37 414)
Bucket digging force – lbf. (kN)	34,621 (154)	39,566 (176)	56,157 (250)



# MINI EXCAVATORS

SPECIFICATIONS	CX15EV	CX17C	CX26C	CX30C
<b>Battery Capacity</b>	21.5 kWh	N/A	N/A	N/A
<b>Gross hp (kW)</b>	N/A	16.8 (12.5) @ 2300 RPM	24.8 (18.5) @ 2300 RPM	24.8 (18.5) @ 2300 RPM
<b>Maximum digging depth*</b>	6 ft 9 in (2 045 mm)	7 ft 3 in (2200 mm)	7 ft 11 in (2 420 mm)	8 ft. 2 in. (2 500 mm)
<b>Operating weight – lb. (kg)**</b>	3,186 (1 445)	3,910 (1 775)	5,520 (2 505)	6,306 (2 860)
<b>Bucket digging force – lbf. (kN)</b>	2,600 lbf (11.5)	3,490 (15.5)	4,740 (21.1)	4,520 (20.1)

SPECIFICATIONS	CX37C	CX42D	CX57C	CX60C
<b>Gross hp (kW)</b>	24.4 (18.2) @ 2200 RPM	43.3 (32.3) @ 2300 RPM	66.9 (49.9) @ 2400 RPM	64.7 (48.3) @ 2200 RPM
<b>Maximum digging depth*</b>	10 ft 3 in (3 135 mm)	10 ft 1 in (3 085 mm)	12 ft 6 in (3 820 mm)	11 ft 9 in (3 570 mm)
<b>Operating weight – lb. (kg)**</b>	8,350 (3 790)	9,921 (4500)	12,320 (5 590)	13,760 (6240)
<b>Bucket digging force – lbf. (kN)</b>	6,900 (30.7)	9,667 (43)	9,550 (42.4)	9,190 (40.9)

\*Increased digging depth can be achieved with the long arm configuration.

\*\*Operating weight will vary depending on configuration.

# HEAVY EXCAVATORS

SPECIFICATIONS	CX350D	CX490D	CX500D	CX750D
<b>Net hp (kW)</b>	268 (200)	362 (270)	362 (270)	460 (343)
<b>Maximum digging depth</b>	26 ft 8 in (8 140 mm)	30 ft 2 in (9 200 mm)	21 ft 4 in (6 490 mm)	32 ft 4 in (9 850 mm)
<b>Operating weight – lb. (kg)</b>	82,483 (37 414)	109,300 (49 600)	111,800 (50 700)	158,300 (71 800)
<b>Bucket digging force – lbf. (kN)</b>	56,157 (250)	60,700 (270)	70,400 (313)	75,090 (334)



# FULL-SIZE WHEEL LOADERS

SPECIFICATIONS	521G	621G*	721G*	821G
Net peak hp (kW)	131 (98)	162 (121)	179 (133)	213 (159)
Operating weight – lb. (kg)	24,203 (10 978)	28,254 (12 816)	32,633 (14 802)	40,057 (18 170)
Full turn tipping load – lb. (kg)**	16,159 (7 330)	18,749 (8 504)	20,212 (9 168)	24,515 (11 120)
Bucket breakout force – lbf. (kg)	20,934 (9 495)	24,031 (10 900)	30,485 (13 828)	35,288 (16 007)
Bucket Size: GP with Bolt-on-Edge – yd <sup>3</sup> . (m <sup>3</sup> )	2.1 (1.6)	3.0 (2.3)	3.5 (2.7)	4.25 (3.2)
Max material density – SAE lb/yd <sup>3</sup> . (kg/m <sup>3</sup> )**	3,847 (2 283)	3,125 (1 854)	2,887 (1 713)	2,884 (1 711)

SPECIFICATIONS	921G	1021G	1121G
Net peak hp (kW)	242 (180)	304 (227)	329 (245)
Operating weight – lb. (kg)	45,070 (20 443)	56,365 (25 567)	61,650 (27 964)
Full turn tipping load – lb. (kg)**	28,529 (12 940)	35,717 (16 201)	38,454 (17 443)
Bucket breakout force – lbf. (kg)	37,688 (17 095)	45,056 (20 437)	49,934 (22 650)
Bucket Size: GP with Bolt-on-Edge – yd <sup>3</sup> . (m <sup>3</sup> )	4.75 (3.6)	5.5 (4.2)	6.25 (4.8)
Max. material density – SAE lb/yd <sup>3</sup> . (kg/m <sup>3</sup> )**	3,003 (1 782)	3,247 (1 927)	3,076 (1 825)


\*Alternative machine configurations available (e.g., Extended Reach).  
 \*\*ISO 14397-1 Deflected Tires.

## SiteConnect Module Onboard

Major new product rollouts from CASE – including the G Series wheel loaders, E Series excavators, TV620B compact track loader and the CASE DL550 Minotaur compact dozer loader – deliver new ways of connecting you with your fleet of equipment and fleet management operators. Scan the code to learn more.



SITECONNECT MODULE AND SITEMANAGER APP

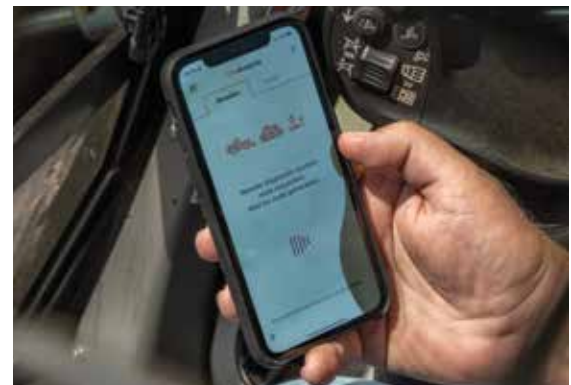





## COMPACT WHEEL LOADERS

SPECIFICATIONS	21F	21F XT	121F	121F XT	221F	321F
<b>Net hp (kW)</b>	55 (41)	55 (41)	60 (45)	60 (45)	70 (52)	70 (52)
<b>Operating weight – lb. (kg)</b>	11,272 (5 113)	10,979 (4 980)	11,618 (5 270)	11,067 (5 020)	12,547 (5 691)	13,303 (6 034)
<b>Bucket breakout force – lbf. (kg)</b>	9,199 (4 172)	6,753 (3 063)	8,971 (4 069)	6,559 (2 975)	10,959 (4 971)	10,076 (4 570)
<b>Ref. bucket capacity, heaped – yd<sup>3</sup>. (m<sup>3</sup>)</b>	0.92 (0.7)	0.92 (0.7)	1.05 (0.80)	1.05 (0.80)	1.2 (0.9)	1.3 (1.0)
<b>Max. material density – ISO lb/yd<sup>3</sup>. (kg/m<sup>3</sup>)</b>	3,821 (2 267)	3,853 (2 286)	3,296 (1 956)	3,385 (2 008)	3,404 (2 020)	3,131 (1 858)

Data is based upon the use of a general purpose bucket with Bolt on Edge.



# DOZERS

SPECIFICATIONS	650M	750M	850M	1150M
Net hp (kW) @ 2000 RPM	68 (50.6)*	92 (69)	112 (84)	127 (95)
Operating weight – lb. (kg)	16,405 (7 441)	20,679 (9 380)	22,750 (10 320)	32,637 (14 804)
Drawbar pull – lbf. (kN)	39,086 (173.9)	41,010 (182.4)	41,010 (182.4)	48,000 (213.5)
Blade width – in. (mm)	109 (2 769)	110 (2 796)	124 (3 150)	132 (3 353)

SPECIFICATIONS	1650M	2050M
Net hp (kW) @ 2000 RPM	150 (112)	214 (160)
Operating weight – lb. (kg)	39,557 (17 940)	45,414 (20 599)
Drawbar pull – lbf. (kN)	61,200 (272.2)	81,000 (360)
Blade width – in. (mm)	156 (3 962)	157.5 (4064)

\*Measured at 2200 RPM.





# MOTOR GRADERS

SPECIFICATIONS	836C	836C AWD	856C	856C AWD
<b>Net hp (kW) @ 2200 RPM</b>	137/154 (102/115)	137/154 (102/115)	173/190 (129/142)	173/190 (129/142)
<b>Operating weight – lb. (kg)</b>	26,466 (12 005)	27,128 (12 305)	33,966 (15 407)	34,848 (15 807)
<b>Blade Width – ft. in. (mm)</b>	11 ft. 0 in. (3 355 mm)	11 ft. 0 in. (3 355 mm)	12 ft. 0 in. (3 658 mm)	12 ft. 0 in. (3 658 mm)
<b>Turning radius – ft. in. (mm)</b>	21 ft. 8 in. (6 600 mm)	22 ft. 4 in. (6 800 mm)	23 ft. 11 in. (7 300 mm)	23 ft. 11 in. (7 300 mm)



## ATTACHED TO SUCCESS

Your machine is the platform. Your attachments make the difference in how much work you win and how profitable that machine is. We've got hundreds of attachments across the CASE product line that help make your work easier and help you do more work with the machine. Contact your local dealer, and visit [CaseCE.com/Attachments](http://CaseCE.com/Attachments) for more information.

### DID YOU KNOW?

You can shop for CASE attachments, parts, fluids filters and more through your local dealer — online! Scan the QR code now and get ahead of your parts and attachment needs.

LEARN MORE



### STAY CONNECTED

We're here to help. Sign up for the CASE newsletter now and get a monthly email with stories from your peers, technical tips, product intel and more!

LEARN MORE



# COMPACTION

SOIL COMPACTION	SV207E	SV211E	SV213E	SV215E	SV217E
Gross hp (kW)	75 (55.4)	134 (100)	134 (100)	154 (115)	154 (115)
Operating weight – lb. (kg)	15,400 (6 990)	25,630 (11 625)	27,730 (12 580)	32,570 (14 775)	35,880 (16 275)
Centrifugal force – lbf. (kN)	29,450 - 35,070 (131 - 156)	34,845 - 64,070 (155 - 285)	34,845 - 64,070 (155 - 285)	48,334 - 73,063 (215-325)	49, 908 - 74,861 (222-333)
Drum width – in. (mm)	66.1 (1 680)	83.9 (2 130)	83.9 (2 130)	83.9 (2 130)	83.9 (2 130)

ASPHALT COMPACTION	DV23E	DV23CE	DV26E	DV26CE
Gross hp (kW)	33.5 (25)	33.5 (25)	33.5 (25)	33.5 (25)
Operating weight – lb. (kg)	4,960 (2 250)	4,600 (2 085)	5,490 (2 490)	5,180 (2 350)
Frequency – VPM (Hz)	3,480 - 3,960 (58 - 66)	3,480 - 3,960 (58 - 66)	3,480 - 3,960 (58 - 66)	3,480 - 3,960 (58 - 66)
Drum width – in. (mm)	39.4 (1 000)	39.4 (1 000)	47.2 (1 200)	47.2 (1 200)

ASPHALT COMPACTION	DV36E	DV45E	DV45CE
Gross hp (kW)	43.9 (32.8)	43.9 (32.8)	43.9 (32.8)
Operating weight – lb. (kg)	8,290 (3 760)	10,252 (4 650)	9,535 (4 325)
Frequency – VPM (Hz)	2,460 - 3,300 (41 - 55)	2,460 - 3,300 (41 - 55)	2,460 - 3,300 (41 - 55)
Drum width – in. (mm)	51.2 (1 300)	54.3 (1 380)	54.3 (1 380)



ASPHALT COMPACTION	DV209D	DV209CD	DV210D	DV210CD
Gross hp (kW)	100 (74.4)	100 (74.4)	100 (74.4)	100 (74.4)
Operating weight – lb. (kg)	21,080 (9 560)	20,750 (9 410)	22,930 (10 400)	22,440 (10 180)
Frequency – VPM (Hz)	2,520 - 4,020 (42 - 67)*	2,520 - 4,020 (42 - 67)*	2,520 - 4,020 (42 - 67)*	2,520 - 4,020 (42 - 67)*
Drum width – in. (mm)	66 (1 680)	66 (1 680)	66 (1 680)	66 (1 680)

\*Frequency range includes standard and high frequency options.

PNEUMATIC COMPACTION	PT240D
Gross hp (kW)	100 (74.4)
Operating weight – lb. (kg)	21,380 (9 700)
Max. operating weight – lb. (kg)	52,910 (24 000)
Drum width – in. (mm)	78.2 (1 986)





Protected by  
**ProCare**

FACTORY WARRANTY  
PLANNED MAINTENANCE  
TELEMATICS



3-yr/3000-hr  
Full-Machine Factory  
Limited Warranty\*  
**STANDARD**



3-yr/2000-hr  
Planned Maintenance  
**STANDARD**



3-yr  
SiteWatch™ Subscription  
**STANDARD**



# SUPPORT COMES STANDARD



## STRONGER PRODUCT SUPPORT SOLUTIONS

Your CASE dealer knows how you can best maximize your equipment investment and uptime — with CASE genuine parts, expert service and a complete range of product support solutions including CASE remanufactured and All Makes parts. CASE supports better parts availability and faster deliveries through nine parts distribution centers in North America and a forecasting system to ensure that the right parts will be there when you need them. And only CASE dealers have exclusive access to the Electronic Service Tool (EST) that quickly pinpoints machine issues. Just ask your dealer for details.



## FLEXIBLE FINANCIAL OPTIONS

Specialized finance programs and flexible leasing packages are available for industry-leading CASE equipment while no-nonsense warranties and comprehensive protection plans ensure that your equipment is protected. As the only finance company dedicated to CASE, we offer strong products and services designed around your unique service needs.

\*See your dealer for the complete terms of CNH Industrial's Warranty and Limitations of Liability, which contains certain limits and exclusions. ProCare is a factory-fit program available on new heavy machine orders.

# CASE SITEWATCH TELEMATICS

## REAL DATA. REAL ACTION.

CASE SiteWatch telematics empowers equipment owners and operators to make important decisions about their equipment and business based on current data. CASE SiteWatch has been enhanced with an all-new dashboard, more intuitive navigation and new overview sections that spotlight critical information without requiring the user to search extensively for the data.

### CASE SiteWatch highlights include:

- + **New dashboard featuring five key tools for total fleet management.**
- + **Simplified reporting and fleet information — available in the office, in the field or on the road.**
- + **Compliant with the Association of Equipment Management Professionals (AEMP) 2.0 telematics standard — deployable with mixed fleets.**
- + **Standard for three years on all CASE heavy equipment with CASE ProCare; standard on select CASE backhoes; standard on the all-new CASE Minotaur DL550 compact dozer loader; standard on the new TV620B compact track loader; and standard on all new D Series and EV mini excavators; and available as an option on other CASE equipment. Standard on new CASE rough terrain forklifts later in 2023.**
- + **Ability to share access with dealer service departments to make preventive maintenance more collaborative and to identify equipment issues before downtime occurs.**



LEARN MORE





# CASE SITECONTROL PRECISION CONSTRUCTION SOLUTIONS

Move dirt once. Reduce rework. Increase productivity. Get the job done with less wear and tear on your equipment. Control job costs and bid new work more aggressively. Machine control matched with CASE equipment can significantly increase the amount of work you do, finish it with greater quality and efficiency, and lower the operating costs of your business while increasing profitability. CASE and your local CASE SiteControl Certified dealer have the solutions to accomplish all of this and more.



## CASE PRECISION HIGHLIGHTS

### Factory-Fit Machine Control for Dozers

CASE 750M through 2050M dozers are now available with factory-fit machine control solutions from Leica Geosystems, part of Hexagon. This includes factory installed and calibrated 2D, dual mast 3D and SiteControl CoPilot precision construction solutions.

LEARN MORE



### OEM-Fit Machine Control for Excavators

CASE E Series excavators are now available with OEM-Fit machine control, making it easier than ever to experience the power of CASE excavators with 2D and 3D precision solutions — from greater productivity to less wear and tear on your equipment.

LEARN MORE



### CASE Precision Grader Blade for CTLs

The CASE Precision Grader Blade is a powerful new attachment that turns your large-frame compact track loader into a grading solution that performs like a motor grader. The smaller footprint of the CTL matched with the attachment makes this a versatile and compact solution for precision grading.

LEARN MORE



For all CASE machine control and precision construction solutions, please visit [CaseCE.com/SiteControl](https://CaseCE.com/SiteControl).



# BUILDING A STRONG CASE.

Since 1842, we at CASE Construction Equipment have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity.

We strive to make it easier for you to implement emerging technologies and new compliance mandates.

Today, our global scale combined with our local expertise enables us to keep customers' real-world challenges at the center of our product development. This focus has led to numerous innovations like the CASE Minotaur™ DL550 compact dozer loader, Ride Control™, adjustable electro-hydraulic controls, Blade Shake, PowerLift™, over-center boom design and the peace of mind that only CASE ProCare provides.

Every CASE machine is backed by more than 315 North American dealer locations, thousands of OEM, remanufactured and all-makes parts, and flexible financing and insurance options that provide the kind of reliable, steadfast support you expect from a professional partner.

We are passionate about improving the lives of others, whether investing in our veterans or raising awareness about local infrastructure initiatives through Dire States. Our goal is to build both stronger machines — and stronger communities.

At the end of the day, we do what's right by you and your communities so that you can always count on CASE.

[CaseCE.com](http://CaseCE.com)

©2023 CNH Industrial America LLC. All rights reserved. CASE, CNH Industrial Capital and CNH Industrial Trademarks are registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

Form No. CCE202303FL  
Replaces Form No. CCE202210FL

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly.

NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.